

SP 22.000 DIRT LEVEL SENSOR

With level sensor and integrated prefilter: For challenging drainage tasks the submersible dirty water pump SP 22,000 Dirt Level Sensor manages to pump out dirty water at a rate of up to 22,000 l/h.



Order no.

1.645-852.0


Technical data

EAN code		4054278994505
Max. Motor Rating	W	750
Max. Flow Rate	l/h	< 22000
Delivery Temperature	°C	max. 35
Delivery Head	m	8
Pressure	bar	max. 0.8
Grain Size	mm	max. 30
Depth of Immersion	m	max. 7
After-Running Time	ss	15
Min. Residual Water, manual	mm	35
Residual Water Height	mm	35
Connecting Thread		G1 1/2
Power Cable	m	10
Voltage	V	230 - 240
Frequency	Hz	50
Weight without accessories	kg	6.7
Weight incl. packaging	kg	7.6
Dimensions (L × W × H)	mm	238 × 293 × 354

Equipment

Comfortable Carrying Handle	■
Connecting Hose	1", 1 1/4", 1 1/2"
Easy hose connection thanks to Quick Connect	■
Switching between manual/automatic operation	Switch on the pump
Level Sensor: Continuous switching level definition	■
Integrated Stainless Steel Prefilter	■
In automatic operation (auto), the pump automatically switches with the water level	■
In manual operation, the pump runs continuously until the minimum quantity of residual water is reached	■
Ceramic Face Seal	■

■ Included in delivery.

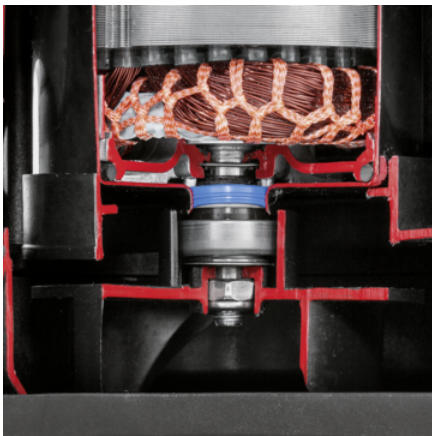

Ceramic Face Seal

- For an extra long lifetime.



Level Sensor


- For continuously variable definition of the switch-on and switch-off points of the pumps.



Quick Connect

- Connection thread for quick and uncomplicated connection of 1", 1 1/4" and 1 1/2" hoses.

EQUIPMENT FOR SP 22.000 DIRT LEVEL SENSOR 1.645-852.0

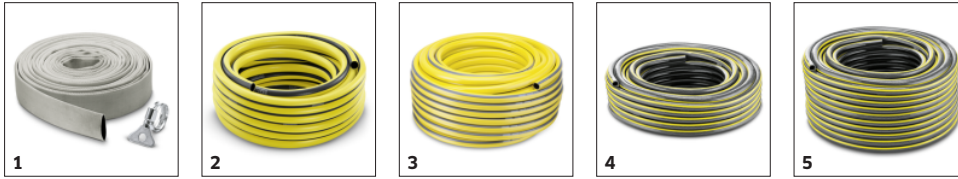

		Order no.	Description	
MISCELLANEOUS				
Flat Hose Set	1	2.997-100.0	The Kärcher flat hose set is the perfect addition to your pump. An ideal hose for pumping out dirty water from your flooded area.	<input type="checkbox"/>
HOSES				
PrimoFlex® hose 3/4" - 25 m	2	2.645-142.0	PrimoFlex® quality garden hose (3/4") 25 m. Pressure-resistant, reinforced braided. Unharmful to health. Bursting pressure: 24 bar. Wide operating temperature range from -20 to 65 °C.	<input type="checkbox"/>
PrimoFlex 1" 1m	3	2.645-247.0		<input type="checkbox"/>
Hose Performance Plus 3/4" -25m	4	2.645-322.0	Robust and extremely resistant to kinks, the Performance Plus garden hose is made from high-quality multi-layered woven material - for proven quality and performance.	<input type="checkbox"/>
Hose Performance Plus 3/4" - 50m	5	2.645-323.0		<input type="checkbox"/>

■ Included in delivery. Available accessories. Detergent.