

KÄRCHER

**KÄRCHER CENTER
TRAFALGAR**

PRODUCT SPECIFICATION/INFORMATION



Product Data Sheet

HD 7/16-4 ST, HD 9/18-4 ST & HD 13/12-4 ST

3 phase, wall or floor mounted high-pressure cleaners.

The new HD ST compact stationary high-pressure cleaners feature high quality materials and components throughout, and offer a number of options to tailor them to specific working environments. Choose between wall or floor mounting; powder coated or stainless steel frames and covers; cold or hot water supply; one of three different power levels; and different detergent metering systems – all designed to ensure superb performance and long life in a range of environments, such as kitchens, food processing areas, vehicle wash bays, service areas – in fact any environment where on-demand high pressure cleaning is needed. The range features a long-life 4 pole motor and supports up to six take-off points.




Features and Benefits:

- Long-life 4-pole electric motor and pump with brass head and ceramic pistons
- Different performance classes available to suit customer requirements
- Easy access to all controls
- Small compact machine with status signal lights
- Float tank for continuous water supply and separation
- Painted steel frame and cover, pressure switch controller and vibration damper as standard
- All connections positioned on the bottom side of the machine
- Machine delivered complete with all accessories



Range Comparison

Kärcher wall or floor mount high-pressure cleaners

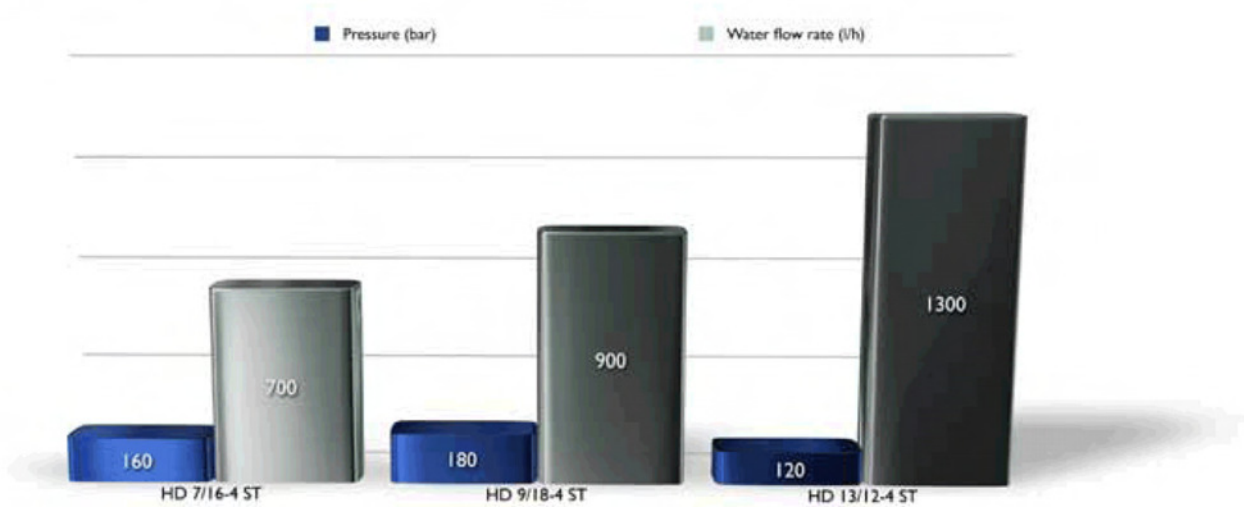

Accessories

Standard accessories



High-pressure hose 10 m, ID 8,
315 bar, AVS-connection
6.390-025



Easy Press trigger gun
4.775-463



Pivoting Spray lance, 1050 mm
4.760-660



Triple-nozzle
HD 7/16- 4ST
4.767-152
HD 9/18-4 ST
4.767-156
HD 13/12-4 ST
4.767-205

Optional accessories



Emergency switch off
2.774-002



Base frame stainless steel
2.210-059

Water supply solenoid valve
2.209-078



1 or 2 RMI, output in LP,
incl. solenoid valve, level
sensor
2.209-779 / 2.209-280



Boiler HWE 860
3.070-036

Technical Specification

	HD 7/16- 4ST	HD 9/18-4 ST	HD 13/12-4 ST
Power supply (Ph/V/Hz)	3/400/50	3/400/50	3/400/50
Water flow rate (l/h)	300-700	460-900	650-1300
Pressure (bar/MPa)	160/16	180/18	120/12
Max. water feed temp / H version (°C)	70/85	70/85	70/85
Connected load (kW)	4.4	6.4	6.4
Weight (kg)	53	62.5	72
Dimensions (L x W x H) mm	533 x 790 x 420	533 x 790 x 420	533 x 790 x 420
Part Number	Ask your salesman for details		



Unit C, Foundry Close
Horsham
West Sussex
RH13 5TX
United Kingdom
0845 611 8012

www.trafalgarcleaningequipment.co.uk

Unit C
Foundry Close
Horsham
West Sussex
RH13 5TX
United Kingdom

T. 01403 273444

E. sales@tce.org.uk

W. trafalgarequipment.co.uk

KÄRCHER

KÄRCHER CENTER
TRAFALGAR